

# SWING MARK ASSEMBLY INSTRUCTIONS

Revision A

- 1 Grass Insert
- 2 Rubber Mat
- 2A Mount hole for right handers
- 2B Mount hole for left handers
- 3 AccuMark™ Practice Ball and Cover  
(Go to SWINGMARK.COM for replacement AccuMark™ Practice Ball and Cover)
- 4 Arm
- 5 Ball mounting screws and washers
- 6 Flat Head Screw
- 7 Large Washer
- 8 Mount Platform
- 9 Post
- 10 Anchor screws and washers for Post
- 11 Locking Pin
- 12 Safety Locking Ring

Please read instructions thoroughly before assembling your SwingMark. Drawings and instructions show assembling right hand configuration.

Figure 1


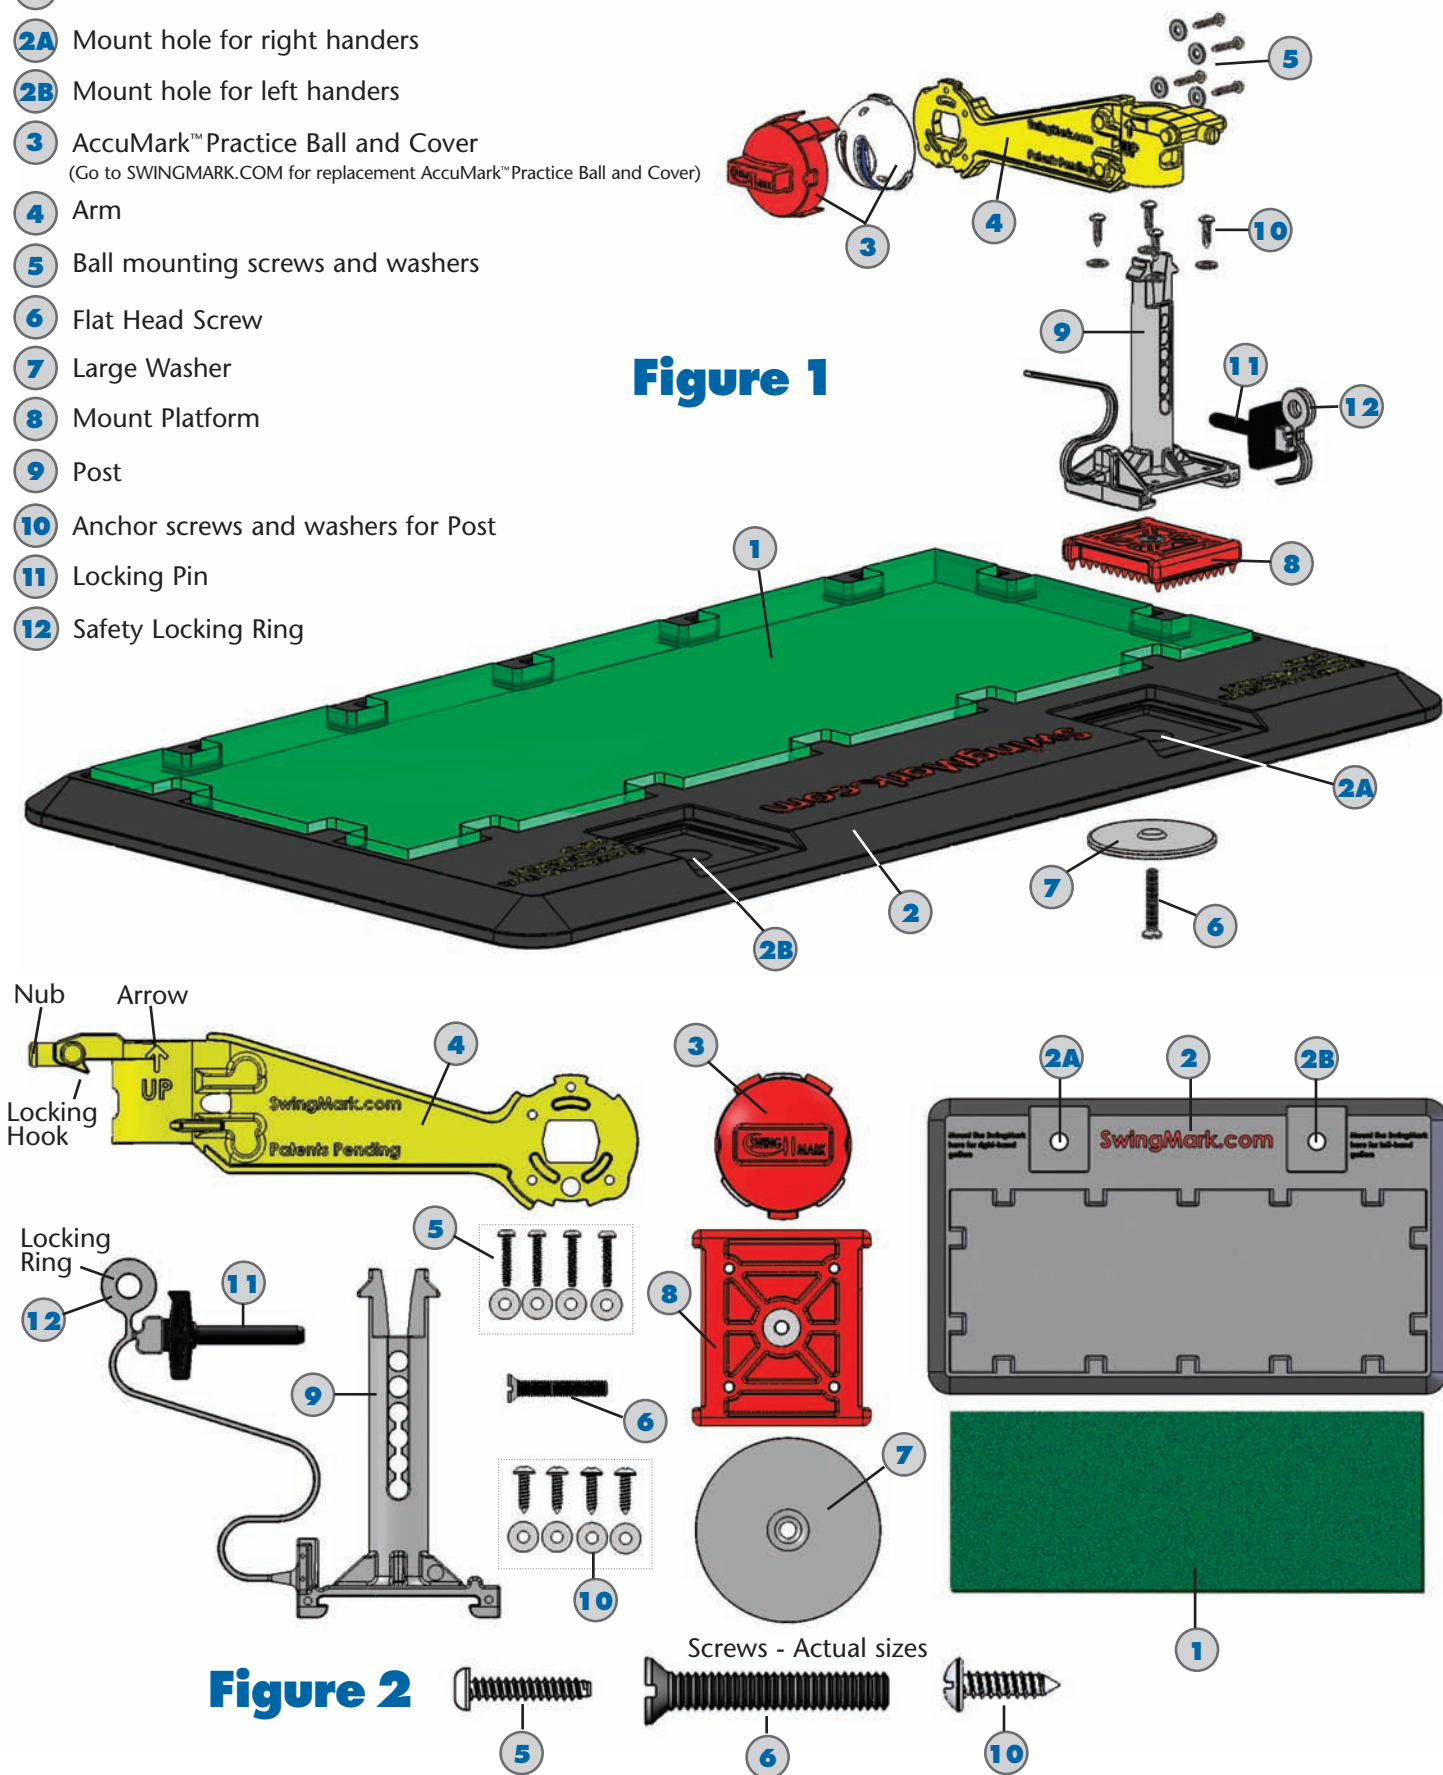


Figure 2



Visit us online for replacement AccuMark™ Balls and FREE golf swing tips at [www.swingmark.com](http://www.swingmark.com)

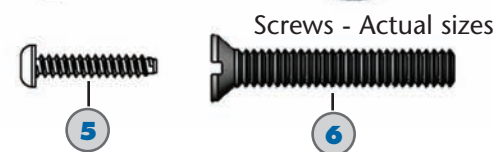

1. Install the Grass Insert (#1) under the hold down tabs on the Rubber Mat (#2).



2. Slide Arm (#4) over the Post (#9) making sure that the arrow on the Arm (#4) points up.




3. Remove Arm (#4) from the Post (#9).



4. Use a small Philips screwdriver to remove the four screws and washers (#5) and attach the AccuMark Practice Ball (#3), including ball cover, on the opposite side of Arm (#4).



5. Now remove Screw (#6), with the Large Washer (#7) attached from underneath.

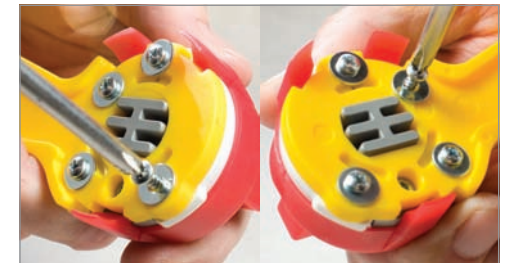

RIGHT HANDED LEFT HANDED


4. Use a small Philips screwdriver to remove the four screws and washers (#5) and attach the AccuMark Practice Ball (#3), including ball cover, on the opposite side of Arm (#4).

DO NOT OVER-TIGHTEN SCREWS... just snug them up against the washers.

**HOW TO ADJUST BALL HEIGHT OR SWITCH FROM RIGHT TO LEFT CONFIGURATION**



1. Remove Safety Locking Ring (#12) from the nub.

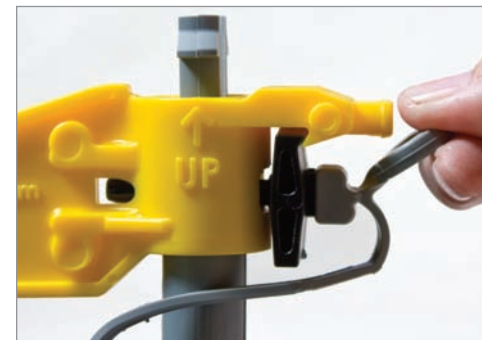


1. Remove Safety Locking Ring (#12) from the nub.



5. Now remove Screw (#6), with the Large Washer (#7) attached from underneath.



4. Push the Locking Pin (#11) into the hole below the locking hook on the Arm (#4), until it pops past the locking hook. Make sure that the Locking Pin (#11) is installed with the Safety Locking Ring up.

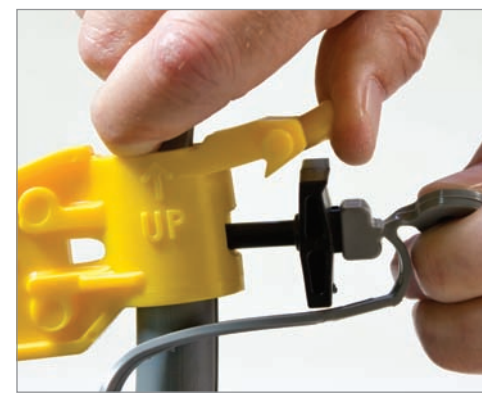

2. Lift Locking Hook with thumb and pull Locking Pin (#11) out by the Safety Locking Ring (#12).

After removing the Locking Pin (#11) you can adjust the ball height by moving the Arm (#4) up or down.

If you're changing the left-right configuration, proceed to Step 3.



6. Install the Mount Platform (#8), with Post (#9) attached, into Mount Hole (#2A) on the Rubber Mat (#2) for right handers and Mount Hole (#2B) for left handers, with lock pin (#11) cord facing as shown. (See Configuration section on reverse side).

Now tighten Screw (#6), with the Large Washer (#7) attached very securely. If the Mount Platform (#8) rotates during practice swings, re-adjust and tighten Screw (#6) tighter.

Now reinstall Arm (#4) on to Post (#9) facing in the right direction.